

DEPARTMENT OF BUILDING ENVIRONMENT AND ENERGY ENGINEERING 建築環境及能源工程學系

**DIMON** Technology Limited Suite 14, 11/F, Cheung Hing Industrial Building 23 Tai Yip Street, Kwun Tong Kowloon Hong Kong

Our reference: DIM-23-R041

Issue date: 28 February 2023

The self-contained emergency luminaire supplied by you was tested in our laboratory on 25 September 2020 and the results were presented as follows.

Description of luminaire:	"DIMON" self-contained emergency light fitting, using LED lamp	
Complete set model:	BATESA-03-3; BAWATY-03-3; SLKWP-03-3; SLK-03-3; SLPP-03-3	
Suitable converter model:	E-SOLO	
Input:	AC 220V +/-10% 50Hz	
Battery:	Sealed Ni-Cd / Ni-MH rechargeable battery pack (9.6V 1.2Ah)	
Full charge period / Duration:	12 hours / 3 hours	
Lamp type:	LED lamp	
Test button and charging LED:	Incorporated	
Low voltage cut off:	Incorporated	
Power cables:	No power cables extended outside the enclosure of the self- contained emergency luminaire or the power cable connecting to lamp is in a corrugated flexible metal conduit	
Case:	The case of BAWATY-03-3 is made of polycarbonate housing and diffuser; The case of BATESA-03-3 is made of Metal housing and Prismatic Diffuser or Opal diffuser; The case of other models is made of metal and there is no exposed flammable part.	

## DIM-23-R041


1



DEPARTMENT OF BUILDING ENVIRONMENT AND ENERGY ENGINEERING 建築環境及能源工程學系

## Test procedures;

- 1. After 12 hours of charging at 220V 50 Hz AC supply, the emergency luminaire has attained 100% of its rated battery capacity.
- 2. The luminaire is positioned on a stand at 3 meters from a wall as shown below (not to scale);

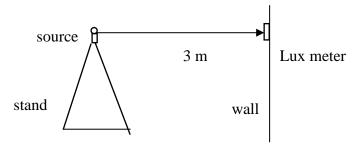

- 3. The room light is switched off. The normal supply is terminated by pulling the plug and the emergency light is automatically turned on.
- 4. The illuminance at a point on the wall which lies on the central axis of the emergency luminaire is measured at 5 s, 1 min, 30 min and then at 30 min intervals after the emergency light is turned on. The maximum duration of emergency light is noted.

The results are as follows;

- 1. The emergency luminaire produced more than 90% of the stipulated illumination level within 5 seconds.
- 2. The total discharge time is over 240 minutes at which the batteries were disconnected by the incorporated low voltage cut out device.
- 3. The emergency luminaire passed the resistance to flame and ignition at a temperature of 850°C as stipulated in clause 13.3.2 of IEC 60598-1:2020, clause 22.16 of BS EN 60598-2-22:2014+A1:2020 and IEC 60695-2-10:2013.

2

44985(0)



DEPARTMENT OF BUILDING ENVIRONMENT AND ENERGY ENGINEERING 建築環境及能源工程學系

## Summary of compliance with PPA/104(A)(5<sup>th</sup> Revision)

Item	Test Requirement of PPA/104(A) (5 <sup>th</sup> Revision)	Verdict
B.3	Emergency lighting luminaires shall be compliant with the glow wire test as stated in sub-clause 13.3.2 of IEC 60598-1:2020 but at temperature of 850°C.	pass
B.4	<ul> <li>All power cables extended outside the enclosure of a self-contained emergency lighting luminaire, other than the wiring connecting the luminaire to normal supply shall conform to:</li> <li>(a) BS EN 50200: 2015 (PH60) and Annex E of BS EN 50200: 2015 (a duration of survival time of 30 minutes) and one of the following standards: <ul> <li>(i) BS EN 60702-1: 2002 +Al: 2015 &amp; BS EN 60702-2: 2002 +Al: 2015</li> <li>(ii) BS 7629-1: 2015 (Cat. Standard 60)</li> <li>(iii) BS 7846: 2015 (Cat. F2 for cables of overall diameter not exceeding 20mm); or</li> </ul> </li> <li>(b) BS 6387: 2013 Cat. CWZ.</li> </ul>	Must be complied with
B.5	An automatic trickle charger with a 220-volt input and suitable output and fitted with pilot lights or other indicating device shall be provided for the batteries. The charger shall be capable of re-charging the battery to 100% of the rated capacity in not more than 12 hours.	pass
B.6	The self-contained luminaires emergency lighting systems shall be capable of maintaining the stipulated lighting levels for a minimum period of 2 hours (rated duration).	pass
B.7	Upon failure of the normal lighting system or in the event of power failure, the emergency lighting shall automatically light up to at least 90% of the stipulated illumination level within 5 seconds.	pass
B.8	Each unit shall be provided with a properly labeled 'TEST' switch and charge monitor light. A low voltage cut out shall also be provided to disconnect the batteries when fully discharged.	pass

The test results from our measurement complied with the relevant sections of BS 5266-1:2016, BS EN 1838:2013 and relevant parts of BS EN 60598-2-22:2014+A1:2020 and regulation PPA / 104 (A) (5<sup>th</sup> Revision) of Fire Services Department specifications.

3

Chrun 0



DIM-23-R041

44985(0)

The Hong Kong Polytechnic University Hung Hom Kowloon Hong Kong 香港九龍紅磡香港理工大學 E beenquiry@polyu.edu.hk T (852) 2766 5847 F (852) 2766 7198 www.polyu.edu.hk/beee

Opening Minds · Shaping the Future · 啟迪思維 · 成就未來



This certificate is issued by PolyU Technology and Consultancy Co. Ltd. (PTeC) to DIMON Technology Limited for the Consultancy Service Agreement signed by both parties. PTeC is the wholly-owned subsidiary of The Hong Kong Polytechnic University (PolyU) and is assigned by the PolyU to deal with all commercial matters on its behalf for the undertaking of external consultancy projects.

This is to certify that the above test was conducted at the laboratory of Department of Building Environment and Energy Engineering of The Hong Kong Polytechnic University with reference to the Agreement signed by both parties.