

LADARY

W:64xH:35mm 40W MAX



LED RECESSED LINEAR . Housing: made by Extrusion aluminum fixture body with multi-type of Diffuser , Louver and Lens system to achieve Low Glare application UGR <6 , UGR 13, UGR 19 and UGR 22.






Technical Data

Luminaire Type-

安裝方式

Tipo de luminaria

Recessed Mount Type 嵌入式 Empotrada Tipo Mount

Dimension-尺寸-Dimensión	<ul style="list-style-type: none"> • L: 1064 x W: 64 x H: 35 mm • L: 1330 x W: 64 x H: 35 mm • L: 1596 x W: 64 x H: 35 mm • L: 2128 x W: 64 x H: 35 mm
Power Consumption Max-燈具功率 Consumo de energía Max	<ul style="list-style-type: none"> • 20W @ L: 1064 x W: 64 x H: 35 mm • 20W @ L: 1330 x W: 64 x H: 35 mm • 30W @ L: 1596 x W: 64 x H: 35 mm • 40W @ L: 2128 x W: 64 x H: 35 mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Factor / 功率因數/Factor de potencia	PF>0.90 @ Full Load
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD<20%
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. DMX Driver AC100-240V 50/60HZ 6. RDM Driver AC100-240V 50/60HZ 7. Emergency Backup >2 hours or >3 hours @ < 24 charger hours 應急電池/Copia de seguridad de emergencia
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control
Beam Angle 光束角 ángulo de haz	<ul style="list-style-type: none"> • 110° PC Diffuser UGR 22 • 65° PC Diffuser+ Louver A UGR 19 • 60° PC Diffuser+ Louver B UGR 13 • 12° & 24° & 38° & 50° & 50°x 50° & 35°x 70° & 70° @ Lens • Asymertric Angle for Wallwasher Application • 130° Penta-PC-Diffuser
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	1. L90(10k) = 50,700 hrs 2. L80(10k) > 63,500 hrs 3. L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	<ul style="list-style-type: none"> • > 80 • > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	<ul style="list-style-type: none"> • 100 Lm/w(2700K), 100 Lm/w(3000K), 110 Lm/w(4000K), • 120 Lm/w(5000K), 120 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	<ul style="list-style-type: none"> • 130 Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), • 150 Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and acrylic or PC Diffuser or PMMA Lens 壓鑄鋁和亞克力或PC擴散器或PMMA透鏡 Aluminio fundido a presión y acrílico o PC Difusor Lente PMMA
Housing Color 外殼顏色 color de la carcasa	Matte white / Matte black / Matte silver 啞光白色 / 啞光黑色 / 啞光銀色 Blanco mate / Matte black / Astilla mate
Ingress Protection-防護等級 Protección de ingreso	IP20
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / + 50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 EMC: EN55015 ; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574 ; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384
Certification-認證-Certificación	    

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [LADARY-40W](#)

LADARY - - _____
Power Consumption

Power Consumption	
Code	Description
20W	20W @ L:1064 mm
20W	20W @ L:1330 mm
30W	30W @ L:1596 mm
40W	40W @ L:2128 mm

BEAM ANGLE



5-surface



UGR 22



UGR 19



UGR 13



UGR 6



Asymmetric



12°



24°



38°



50°



35X70°




50X50°



70X70°

Technical Drawing

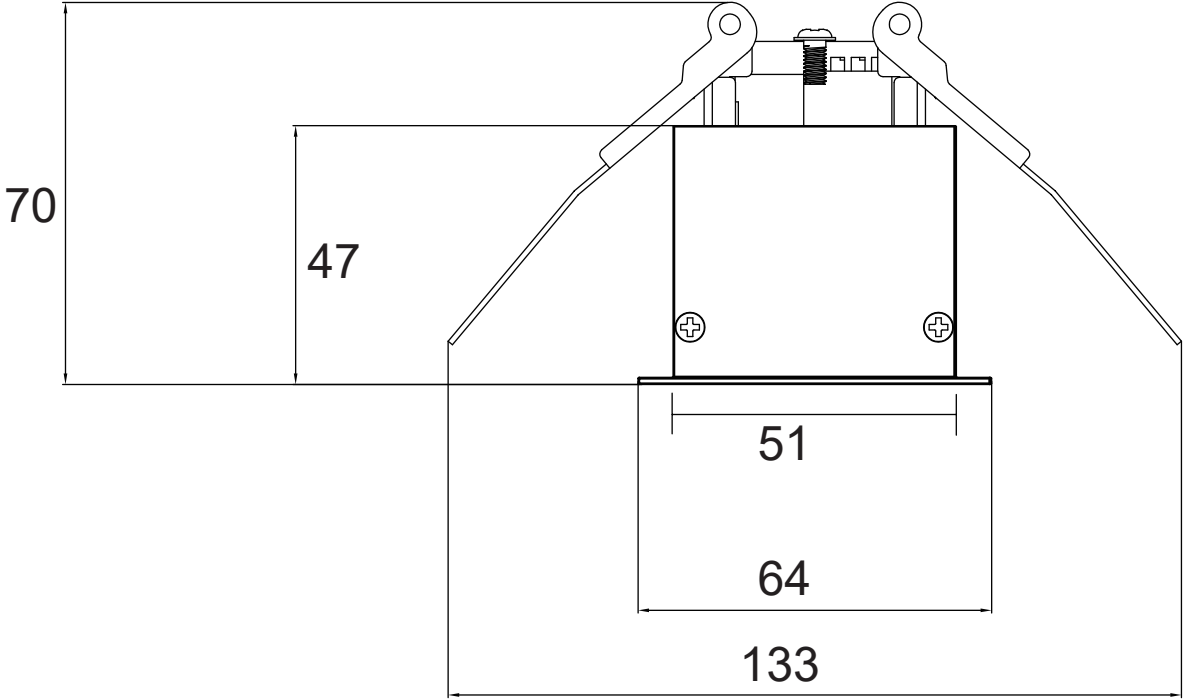

Length: 1064 / 1330 / 1596 / 2128 mm

Unit: mm