

## Polycrystalline Solar Module

### DMT-PPS30W

**36 CELL**

Poly Crystalline Module

**14.23%**

Maximum Efficiency

**30W**

Power Output Range

**0/+5%**

Positive Power Tolerance



### Function Features



#### Withstanding Harsh Environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline.



#### High Efficiency

High module conversion efficiency (up to 14.23%), through innovative manufacturing technology.



#### Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



#### Low-light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



#### Higher Quality Assurance

100% EL test before and after lamination, and finished products EL test, providing higher quality assurance.




#### Maximized Energy Harvest

Impedance matching technology eliminates mismatch losses, more power from each module bin.


### LINEAR PERFORMANCE WARRANTY

10-Year Product Warranty


25-Year Linear Power Warranty

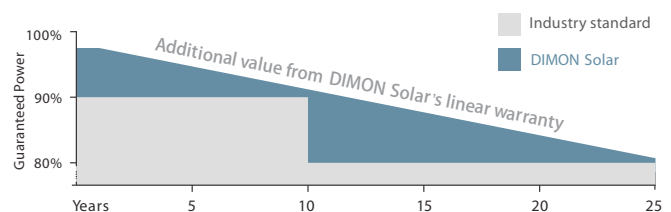


### Engineering Drawings

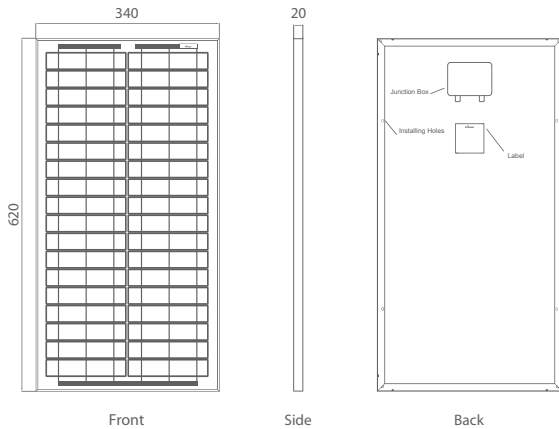

### Current-Voltage Curves

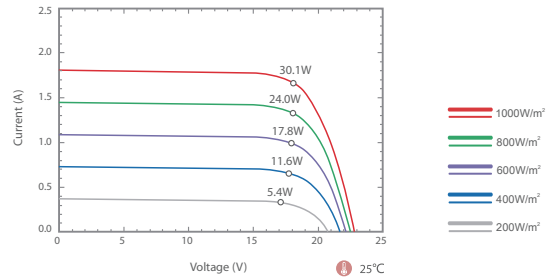

### Power-Voltage Curves

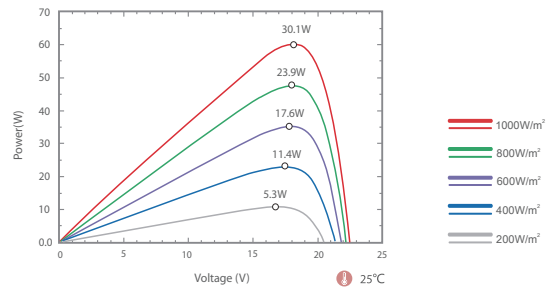

### Technical Specifications

Model	DMT-PPS30W	
<b>Electrical Characteristics</b>		
	STC	NOCT
Maximum Power (Pmax)	30Wp	23Wp
Maximum Power Voltage (Vmpp)	18.0V	16.8V
Maximum Power Current (Impp)	1.67A	1.37A
Open Circuit Voltage (Voc)	22.5V	21.2V
Short Circuit Current (Isc)	1.80A	1.48A
Power Tolerance(Positive)	5%	
Module Efficiency STC	14.23%	
Operating Temperature Range	-40°C to +85°C	
Maximum System Voltage	715V	
Series Fuse Rating	8A	
Temperature Coefficient of Pmax	-0.40 %/°C	
Temperature Coefficient of Voc	-0.30 %/°C	
Temperature Coefficient of Isc	0.05 %/°C	
Nominal Operating Cell Temperature(NOCT)	45±2°C	
<b>Mechanical Characteristics</b>		
Cell Type	Polycrystalline 156 mm	
Cell Number	36 (4x9)	
Dimensions (mm)	340x620x20	
Weight(Kgs)	2.50	
Front Glass	3.2 mm, High Transmission, Low Iron, Tempered Glass	
Frame Type	Anodized Aluminium Alloy	
Junction Box Protection Class	IP 67 Rated	
Connector Type	DC Connector	
Output Cables	0.75 mm <sup>2</sup> , Length: 5000 mm	

STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

\* Remarks: Products specifications are subject to change without notice.