







DRIWOD

Dia115 & 155mm Max15W IP65



- Stainless steel front cover.
- Die-cast aluminium housing with electrostatic plastic coating and tempered clear glass.
- Adopt American CREE original LED light source, high flux output, excellent consistency of light color.
- Ingress Protection: IP66 and Mech impact protection: IK08

Technical Data

Installation method- 安裝方式-Metodo de instalacion	Recessed Mount Type 嵌入式筒燈 Empotrada Tipo Mount
Dimension-尺寸-Dimensión	Dia 115 x H:106 mm Dia 155 x H:162 mm
Cut off Dimension-開孔尺寸-Cortar Dimensión	Dia 100 mm Dia 136 mm
QTY of LEDs-燈珠數量-CANT de LEDs	1 pcs CREE LED Array
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	7W 9W 12W 15W
LED Driver Type LED驅動款式 Tipo de controlador LED	Remote-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 220-240V 50/60HZ 3. 0/1-10V Dimming Driver AC220-240V 50/60HZ 4. DALI Dimming Driver AC220-240V 50/60HZ 5. Emergency Backup >2 hours or >3 hours @ < 12 charger hours 應急電池
LED Driver Features 驅動特性 Funciones del controlador de LED	Power Factor >0.90 Total Harmonic Distortion < 20%
Control Protocol-控制協議 Protocolo de Control	0/1-10V / DALI / DMX 512 / RDM / ZIGBEE Wireless Control
Beam Angle 光束角 ángulo de haz	8° 18° 36° 60°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))
"Lumen Maintenance LM-80 Reported by TM-21"@ 25°C	L70 > 54,000 hrs
LED Life-LED壽命-La vida del LED	>100,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80 >90
Chromaticity Tolerance (initial Macadam) 色度容差 (初始Macadam) Tolerancia de cromaticidad (Macadam inicial)	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	70 Lm/w(2700K) 70 Lm/w(3000K) 80 Lm/w(4000K), 80 Lm/w(5000K) 80 Lm/w(6500K)
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K) 130 Lm/w(3000K) 140 Lm/w(4000K) 140 Lm/w(5000K) 140 Lm/w(6500K)
Housing materials-外殼材料 Materiales de la carcasa	Stainless steel front cover & Die-cast aluminum Housing & Tempered glass lampshade 不銹鋼前蓋+壓鑄鋁外殼+強化玻璃燈罩 Cubierta frontal de acero inoxidable, carcasa de aluminio fundido y pantalla de vidrio templado
Trim Color 框邊顏色 color de corte	Matte grey body & Stainless steel cover 霧面灰色機身和不銹鋼蓋 Cuerpo gris mate y cubierta de acero inoxidable.
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection機械衝擊保護 Protección contra impactos mecánicos	IK08
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-2 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 (RG1) ;ROHS LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547 / IEC 62384
Certification-認證-Certificación	    

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DRIWOD-12W](#)


DRIWOD - -

Power Consumption


Power Consumption	
Code	Description
7W	7W
9W	9W
12W	12W
15W	15W

Beam Angle


8°

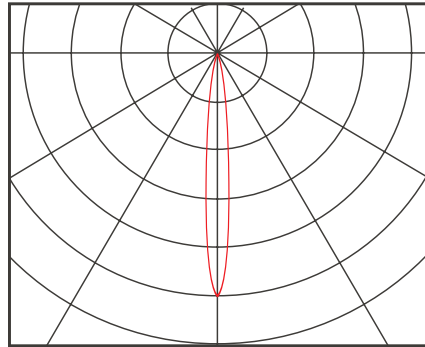

18°

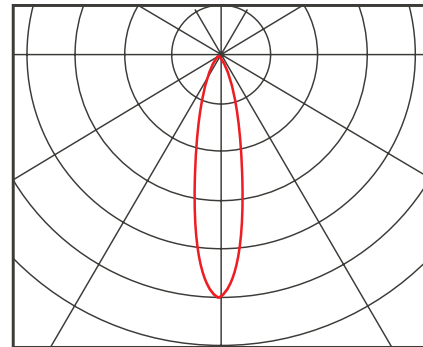

36°

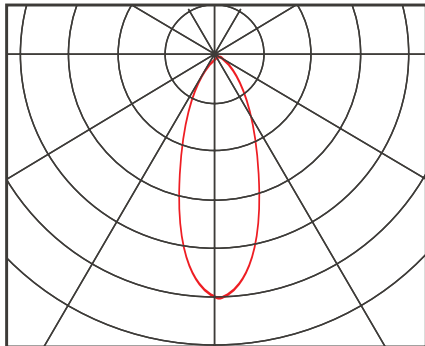

60°

