


DYNAKO

10W-30W








LINEAR DOWN LIGHT. Housing: aluminium, powder-coated, designed as heat sink. Anti-glare reflector and diffusor system made of PMMA. LED module: high-power CREE LEDs Array, CRI>80, LM-80 performance approval >50,000 hours. Integrated-Type 0-10V, DALI, LED constant current control gear. Ingress protection: IP44.

Technical Data

Luminaire Type-安裝方式Tipo de luminaria

Surfaced Mount Type 明裝條燈

Dimension-尺寸-Dimensión	L:138x W:436x H: 83 mm L:272x W:436x H: 83 mm L:405x W:436x H: 83 mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	L:138x W:436x H: 83 mm :10W L:272x W:436x H: 83 mm :20W L:405x W:436x H: 83 mm :30W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming Driver AC220-240V 50/60HZ
LED Driver Features-驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議 Protocolo de Control	0/1-10V or Dali
Beam Angle-光束角ángulo de haz	15° 24° 36°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	80 Lm/w(2700K), 80 Lm/w(3000K), 90Lm/w(4000K), 100Lm/w(5000K), 100 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 135 Lm/w(3000K), 145 Lm/w(4000K), 150 Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and PMMA Lens and Polycarbonate Reflector 壓鑄鋁和PMMA 透鏡和 PC反光杯 Lente de aluminio fundido a presión y PMMA y reflector de policarbonato
Trim Color-框邊顏色-Estilo Color	Matte white / Matte black 啞光白色 / 啞光黑色 Blanco mate / Matte black
Reflector Color-反光杯顏色-Reflector color	Matte Silver 啞銀Plata mate Black 黑色 Negro White 白色 Blanco
Ingress Protection-防護等級 Protección de ingreso	IP20
operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcion amiento	-30 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	ED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-2 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 (RG0) LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547
Certification-認證-Certificación	    

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [DYNAKO-10W](#)


DYNAKO - - _____
Power Consumption

Power Consumption	
Code	Description
10W	10W
20W	20W
30W	30W




Beam Angle


15°

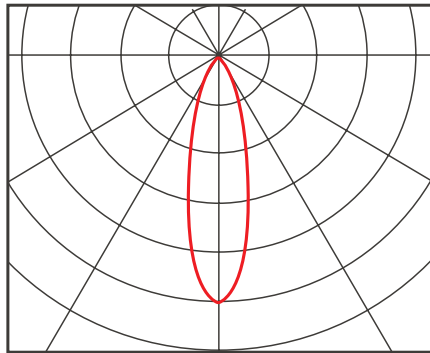




24°

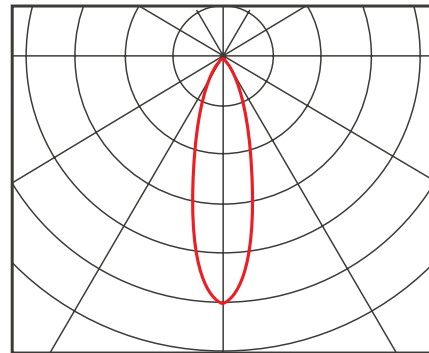

36°

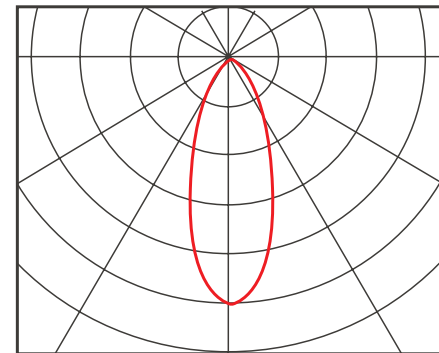

Technical Drawing

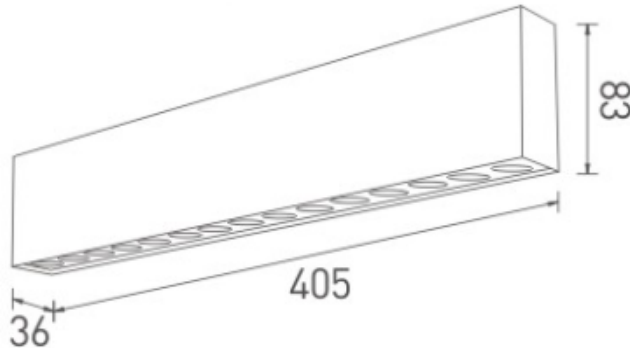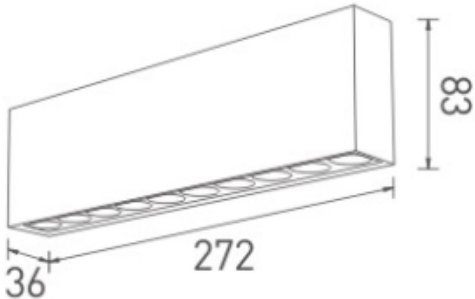

Unit: mm