

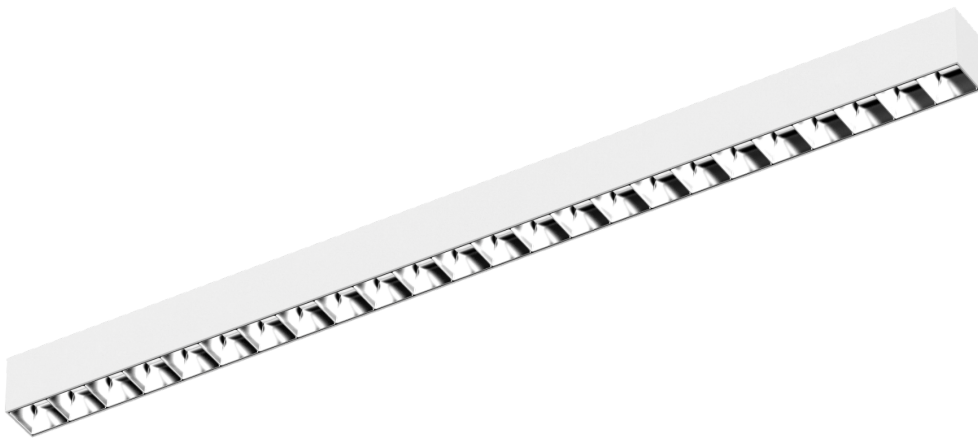


LASHE-G2

W56xH75 mm 40W Max IP20



Reflector Type

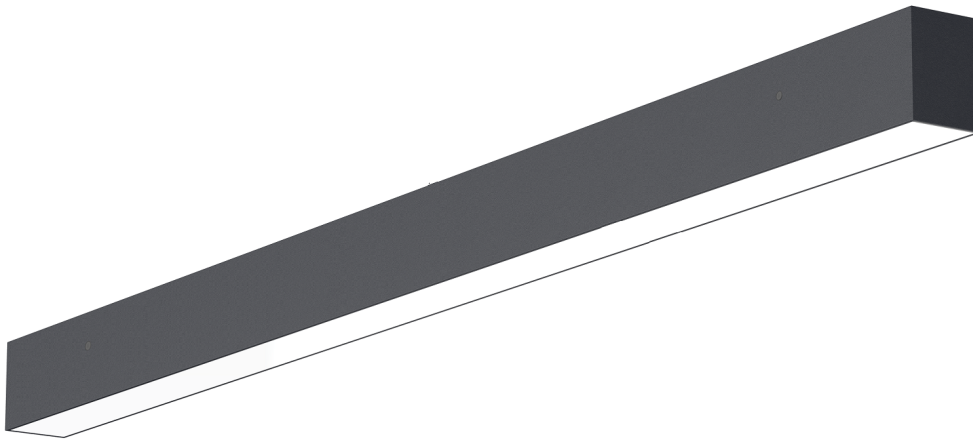

Opal Diffuser Type

LASHE-G2 is new linkable design linear light. Adopt high lumen efficiency SMD LED with even light output, aluminum light body providing excellent thermal management. Pendant with steel rope, surface mounted are all available. With Straight shaped connectors for LINE shape design. Anti-glare design with reflector UGR<19. Continuous lighting with no dark areas with opal polycarbonate diffuser or spot light distribution with reflector and lens control.

LASHE-G2







W56xH75 mm 40W Max IP20

DIMON
TECHNOLOGY

Technical Data

Luminaire Type-安裝方式
Tipo de luminaria

Pendant / surface mounted 吊裝 / 明裝Colgante / montado en superficie

Dimension-尺寸-Dimensión	• L: 605 x W: 50x H: 75mm • L: 966 x W: 50x H: 75mm • L: 1288 x W: 50x H: 75mm
Power Consumption Max-燈具功率 Consumo de energía Max	• L: 605mm : 20W • L: 966mm : 30W • L: 1288mm : 40W
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Factor / 功率因數/Factor de potencia	PF>0.9
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD<20%
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver-Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1 -10V Dimming Driver AC100-240V 50/60HZ 3. Dali Dimming Driver AC100-240V 50/60HZ
Control Protocol-控制協議/Protocolo de Control	1-10V / Dali
Beam Angle Combination 光東角組合 Combinación de ángulo de haz	• Reflector Type反射鏡類型: : 30° 60° • PC Opal diffuserPC 乳白罩擴散器: 120°
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 54,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5700K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80 > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	90 Lm/w(2700K), 90 Lm/w(3000K), 100 Lm/w(4000K), 110 Lm/w(5700K), 110 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	• 140 Lm/w(2700K), 150 Lm/w(3000K), 165 Lm/w(4000K), • 170 Lm/w(5000K), 170 Lm/w(6500K),
Housing materials-外殼材料-Materiales de la carcasa	Aluminium Alloy and Polycarbonate Reflector and Lens or Polycarbonate Opal Diffuser 鋁合金和PC反射器和透鏡或乳白PC擴散器 Reflector de aleación de aluminio y policarbonato o difusor de ópalo de policarbonato
Housing Color-外殼顏色-color de la carcasa	Matte white / Matte black 啞光白色 / 啞光黑色 Blanco mate / Matte black
Reflector Color 反光板顏色/Color del reflector	Matte black / 啞光黑色 / Matte black
Ingress Protection-防護等級 Protección de ingreso	IP20
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: IEC 60598-1; IEC 60598-2-1; IEC62471; IEC 62031; IEC62493 ; IEC 62471 EMC: EN55015 ; IEC/EN 61000-3-2; IEC/EN 61000-3-3; IEC/EN61574 ; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3; IEC/EN61574; EN 55015 ; IEC /EN 62384
Certification-認證-Certificación	     

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [LASHE-20W](#)


LASHE - - _____
Power Consumption

Power Consumption	
Code	Description
20W	20W @ L: 605mm
30W	30W @ L: 966mm
40W	40W @ L: 1288mm




BEAM ANGLE

30°

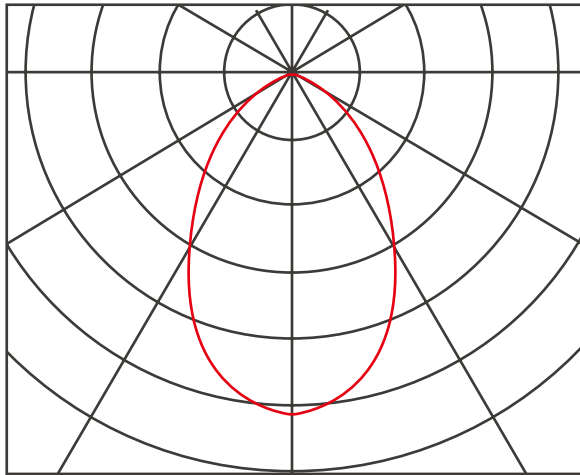


Reflector with lens control

60°

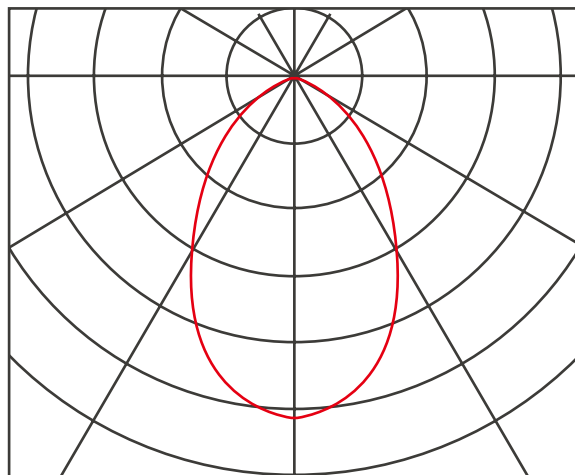


Reflector with lens control

120°

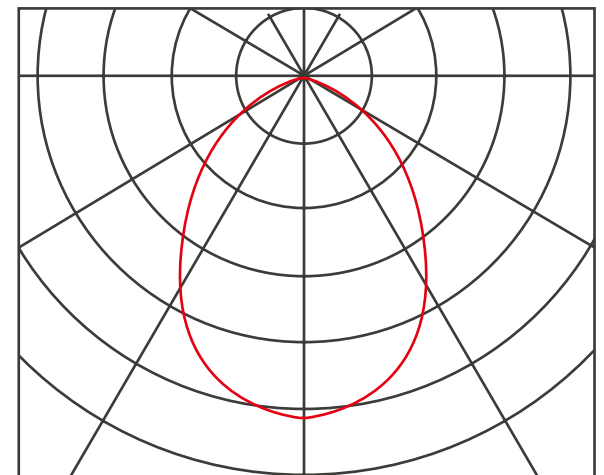


PC Opal diffuser


Pendant Mounted

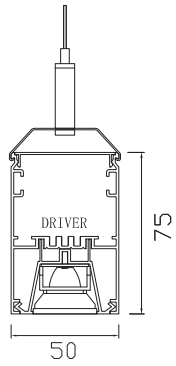

Reflector
and
Lens

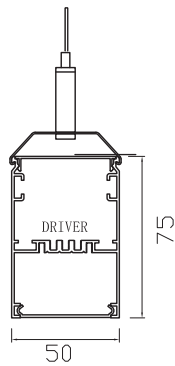

Opal
PC
Diffuser

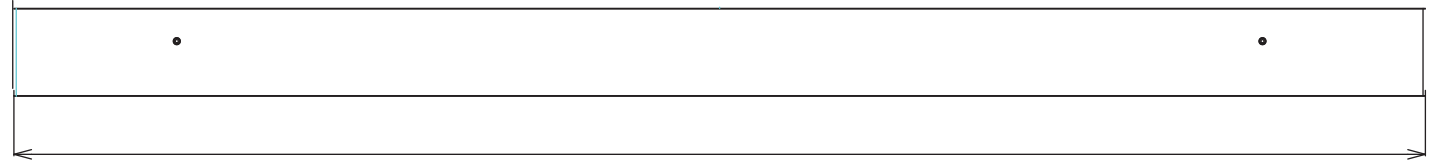


L: 605 / 966 / 1288

Unit: mm




Opal
PC
Diffuser

Surface Mounted



Reflector
and
Lens



Opal
PC
Diffuser



Reflector
and
Lens

15. Connect lamps by connector, make sure both linear lights linked seamless, tighten the screws

