








LATARY

W70xH62xL xxx mm Max 30W IP66

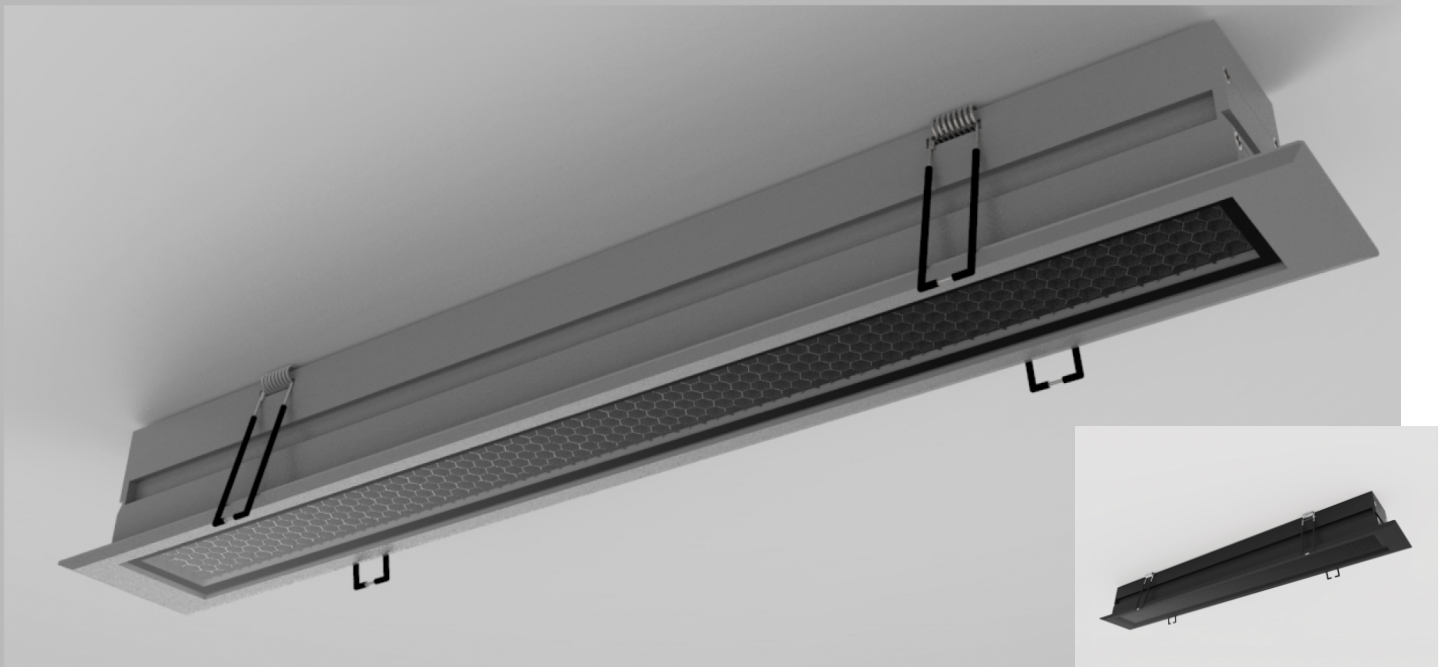

LED RECESSED LINEAR. Housing: Die-cast and extruded aluminum, powder-coated, PMMA Lens system with tempered glass Cover to reach UGR <19. CRI>80, LM-80 performance approval >60,000 hours. Remoted -Type ELV, 0-10V, DALI, DMX and RDM LED constant current control gear. Deep recessed design achieves super eye comfort. The fixture can be available in outdoor as the IP66 Ingress Protection.

Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria	Recessed Mount Type 嵌入式 Empotrada Tipo Mount									
Dimension-尺寸-Dimensión Cut off size -開孔尺寸-Corte el tamaño	<ul style="list-style-type: none"> • L: 530 x W:70 x H62 mm Cut off size : L: 505 x W: 63mm • L: 300 x W:70 x H62 mm Cut off size : L: 285 x W: 63mm 									
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ									
Power Consumption with LED Driver LED燈具包括LED驅動電源功率 Consumo de energía con controlador de LED	<ul style="list-style-type: none"> • 15W @300mm • 20W @ 300mm @ 530mm • 24W @ 300mm@ 530mm • 30W @ 530mm 									
LED Driver Type LED驅動款式 Tipo de controlador LED	<p>Remoted-type LED Driver--Constant Current LED Driver Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED</p> <ol style="list-style-type: none"> 1. ON/OFF Switch AC220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. DMX Driver AC100-240V 50/60HZ 6. RDM Driver AC100-240V 50/60HZ 7. ZIGBEE Wireless Control (Remoted Driver) AC100-240V 50/60HZ 8. Remoted Type Emergency Backup >2 hours or >3 hours @ < 24 charger hours應急電池/Copia de seguridad de emergencia 									
LED Driver Features Constant Current LED Driver: 驅動特性-恆流LED驅動器 Funciones del controlador de LED	<p>PF>0.90 @ AC100V - 240V 50/60Hz THD<20% @ AC100V - 240V 50/60Hz</p>									
Control Protocol/控制協議/Protocolo de Control	<ul style="list-style-type: none"> • Remote LED Driver for 1-10V or Dali • Integrated Decoder : DMX512 or RDM • 1Pixel (1 DMX Channel @ Mono; 3 DMX Channel @ RGB; 4 DMX Channel @ RGBW; 2 DMX Channel @CTA) 									
Light Source Brand-光源品牌-Fuente de luz de marca	CREE (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))									
"Lumen Maintenance LM-80 Reported by TM-21"	<ol style="list-style-type: none"> 1. L90(10k) = 50,700 hrs 2. L80(10k) > 63,500 hrs 3. L70(10k) > 63,500 hrs 									
LED Life-LED壽命-La vida del LED	>60,000 hours									
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K									
Color Rendering Index-顯色指數 Índice de reproducción cromática	<p>> 80 @ White Color >90 @ White Color</p>									
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	<p>Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM</p>									
Beam Angle 光束角 ángulo de haz	9° / 15° / 22° / 30° / 40° / 66° / 83° / 30° x 12° / 40° x 15° / 50° x 10°									
Luminaire Efficacy燈具效率 La eficacia de la luminaria	<table border="1"> <tr> <td>• 55 Lm/W @ RGBW</td> <td>48 Lm/w@ RGB</td> <td>80 Lm/w @ CTA</td> </tr> <tr> <td>• 75 Lm/w @ 2700K</td> <td>80 Lm/w @ 3000K</td> <td>85 Lm/w@4000K</td> </tr> <tr> <td>• 90 Lm/w@5000K</td> <td>90 Lm/w@5700K</td> <td>90 Lm/w@6500K</td> </tr> </table>	• 55 Lm/W @ RGBW	48 Lm/w@ RGB	80 Lm/w @ CTA	• 75 Lm/w @ 2700K	80 Lm/w @ 3000K	85 Lm/w@4000K	• 90 Lm/w@5000K	90 Lm/w@5700K	90 Lm/w@6500K
• 55 Lm/W @ RGBW	48 Lm/w@ RGB	80 Lm/w @ CTA								
• 75 Lm/w @ 2700K	80 Lm/w @ 3000K	85 Lm/w@4000K								
• 90 Lm/w@5000K	90 Lm/w@5700K	90 Lm/w@6500K								
LED Source Luminous Efficacy LED光源光效Fuente luminosa LED Eficacia	<table border="1"> <tr> <td>• 80 Lm/W @ RGBW</td> <td>75 Lm/w@ RGB</td> <td>100 Lm/w @ CTA</td> </tr> <tr> <td>• 100 Lm/w @ 2700K</td> <td>100 Lm/w @ 3000K</td> <td>105 Lm/w@4000K</td> </tr> <tr> <td>• 120 Lm/w@5000K</td> <td>130 Lm/w@5700K</td> <td>130 Lm/w@6500K</td> </tr> </table>	• 80 Lm/W @ RGBW	75 Lm/w@ RGB	100 Lm/w @ CTA	• 100 Lm/w @ 2700K	100 Lm/w @ 3000K	105 Lm/w@4000K	• 120 Lm/w@5000K	130 Lm/w@5700K	130 Lm/w@6500K
• 80 Lm/W @ RGBW	75 Lm/w@ RGB	100 Lm/w @ CTA								
• 100 Lm/w @ 2700K	100 Lm/w @ 3000K	105 Lm/w@4000K								
• 120 Lm/w@5000K	130 Lm/w@5700K	130 Lm/w@6500K								
Housing materials-外殼材料 Materiales de la carcasa	<ul style="list-style-type: none"> • Die-Casted Aluminium and Aluminium Alloy and Tempered Glass • 壓鑄鋁和鋁合金及鋼化玻璃 • Aluminio fundido a presión y aleación de aluminio y vidrio templado de 									
Housing Color 外殼顏色 color de la carcasa	<ul style="list-style-type: none"> • Powder Coated in Silver Grey or Matte Black - UV Resistant powder coating for Anti-corrosion Protection • 銀灰或啞黑色粉末塗料 (抗紫外線和抗腐蝕) • Recubrimiento en polvo en gris plata o negro mate - Recubrimiento en polvo resistente a los rayos UV para protección anticorrosión • Tailor-made/客制生產-Hecho a medida 									
Ingress Protection-防護等級 Protección de ingreso	IP66									
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación									
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C									
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	<p>LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 TM21 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2 IEC/EN 61000-3-3; IEC/EN61574;EN 55015 ; IEC /EN 62384</p>									
Certification-認證-Certificación	     									

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [LATARY-24W](#)




LATARY - - _____
Power Consumption

Power Consumption	
Code	Description
15W	15W @300mm
20W	20W @300mm@ 530mm
24W	24W @300mm@ 530mm
30W	30W@300mm@ 530mm

BEAM ANGLE

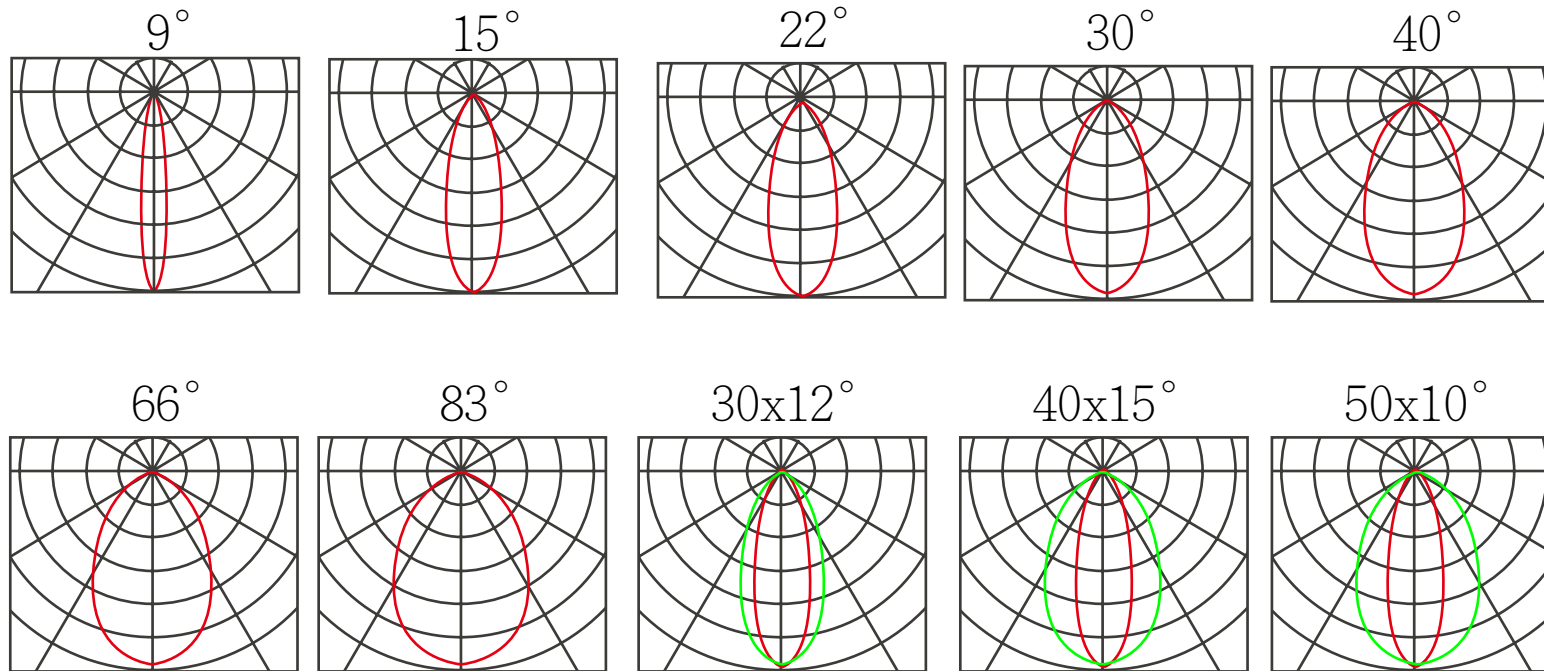

Technical Drawing

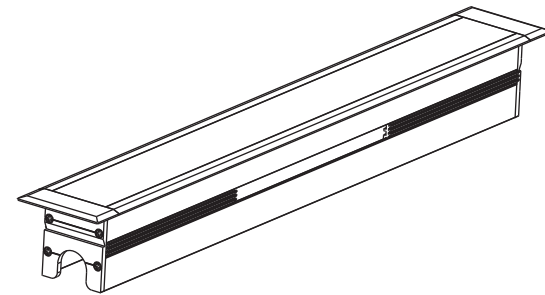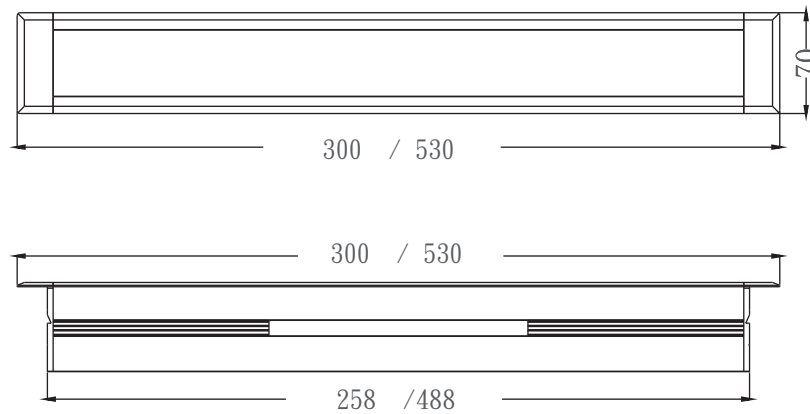

Cut off: 285 x 63mm
505 x 63mm

Unit: mm