

LUKE

14W Max IP65












Down or Up Light



Down and Up Light

- LED OUTDOOR WALL MOUNTED UP AND DOWN LIGHT.
- Housing: die-cast aluminium and frosted tempered glass
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance
- Ingress protection: IP65. IK08

Technical Data

Installation method / 安裝方式 / Metodo de instalacion	Wall Mounted Type - 壁掛式燈具 - Tipo montado en la pared
Dimension-尺寸-Dimensión	Up or Down Light : L:100xW:54 x H: 136 mm Up and Down Light: L:100xW:54 x H: 160 mm
Input Voltage-輸入電壓-Voltaje de entrada	AC 220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	• Up or Down Light : 6W 9W • Up and Down Light: 11W (2x5.5W) 14W (2x7W)
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0/1 -10V Dimming Driver AC220-240V 50/60HZ 3. DALI Dimming Driver AC220-240V 50/60HZ
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議 Protocolo de Control	0/1-10V / DALI
Beam Angle光束角ángulo de haz	• Up or Down Light : 1 x 90° • Up and Down Light: 2 x 90°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 65,000 hrs
LED Life-LED壽命-La vida del LED	>100,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K/ 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	Clear Glass : 80 Lm/w(2700K) 80Lm/w(3000K) 100Lm/w(4000K) 110Lm/w(6500K) Frost Glass : 60 Lm/w(2700K) 60 Lm/w(3000K) 70Lm/w(4000K) 70Lm/w(6500K)
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 140 Lm/w(3000K), 150 Lm/w(4000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and Clear tempered glass or Frosted tempered glass 壓鑄鋁和鋼化玻璃 或 磨砂 玻璃 Fundición de aluminio y vidrio templado
Housing Color外殼顏色 color de la carcasa	Powder Coating :Black RAL9005 / White RAL9003 / Silver Grey RAL9006 粉末塗料: 黑色 RAL9005/ 白色RAL9003 / 銀色RAL9006 Recubrimiento en Polvo: Negro
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~100%, non-condensing-不結霜 sin condensación
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08
Net Weight淨重Peso Neto	Up or Down Light : 0.9KG Up and Down Light : 1.0KG
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: EN 60598-1;EN 60598-2-1; IEC TR62778 IEC62471 ; IEC 62031; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015
Certification-認證-Certificación	        

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [LUKE-9W](#)

LUKE - - _____
Power Consumption


Power Consumption	
Code	Description
6W	6W @ Up or Down Light
9W	9W @ Up or Down Light
11W	11W (2x5.5W) @ Up and Down Light
14W	14W (2x7W) @ Up and Down Light



BEAM ANGLE

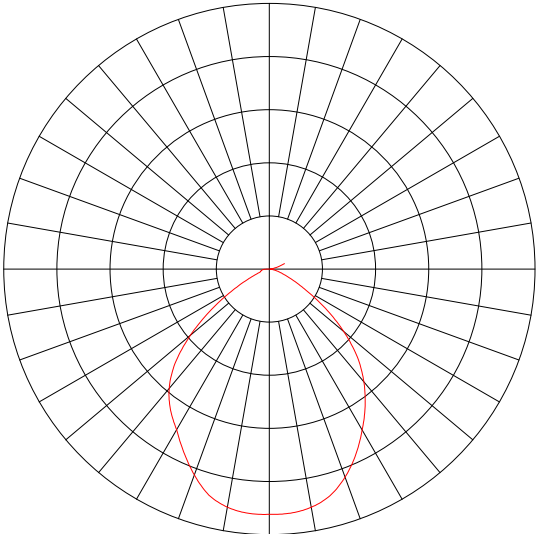

Up or Down Light


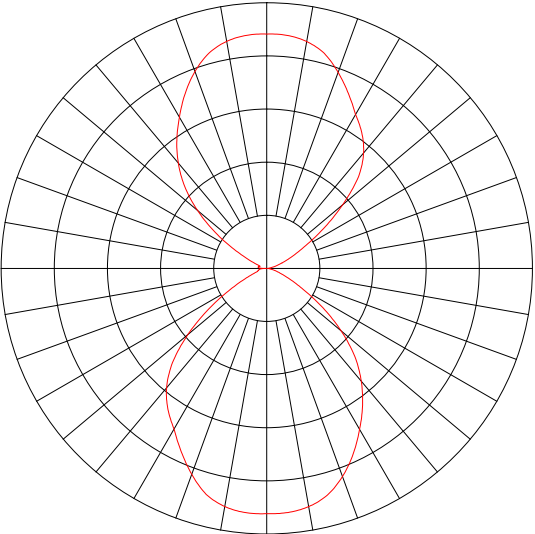


Up and Down Light



Technical Drawing

(Up or Down Light)

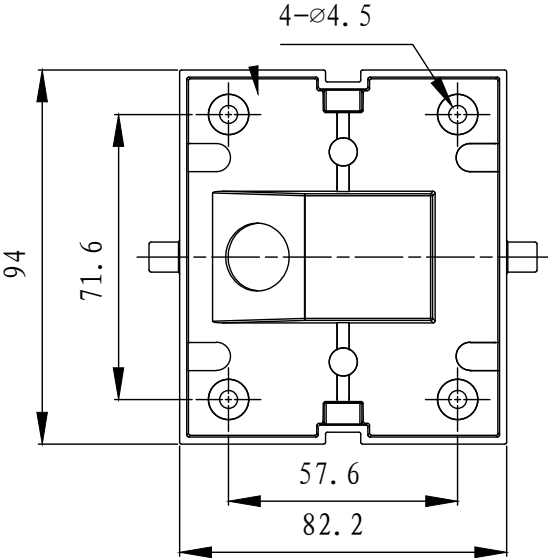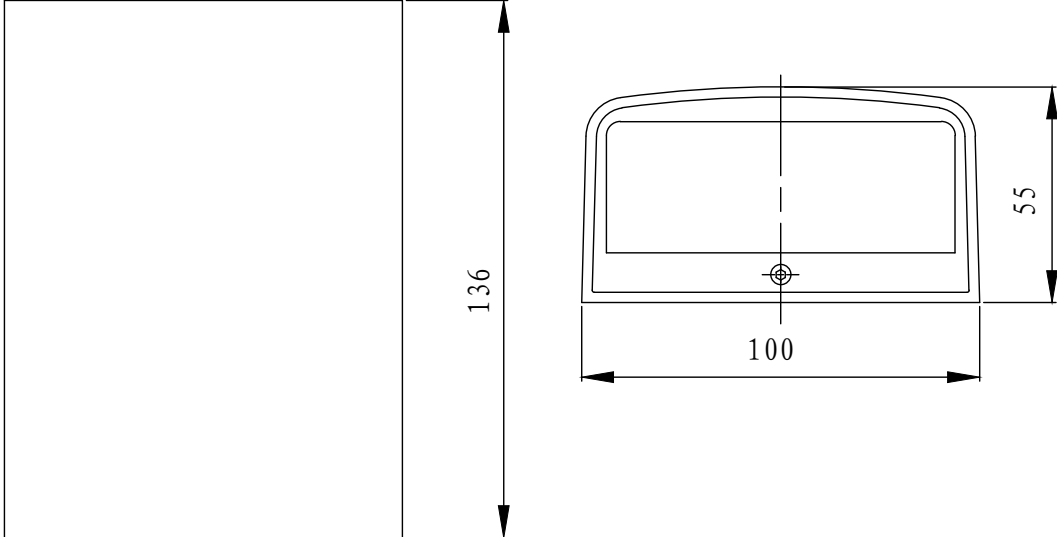




Installation template

Unit: mm

DIMON

Technical Drawing

(Up and Down Light)

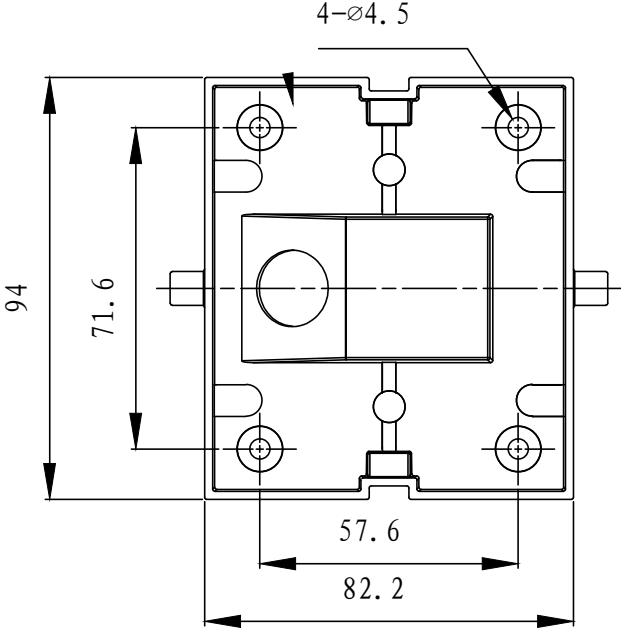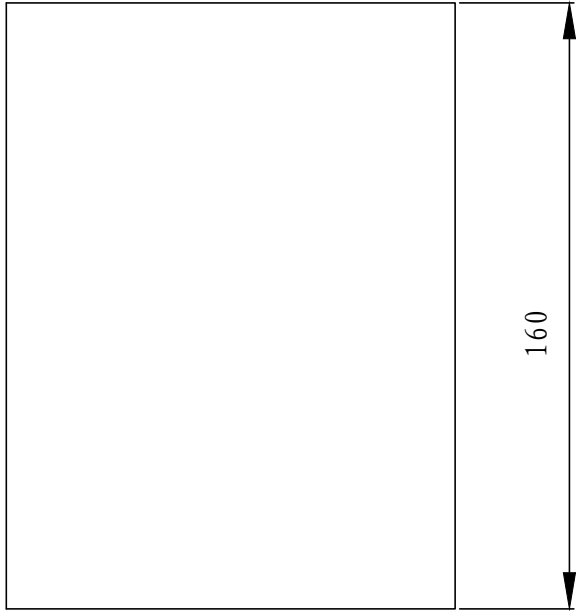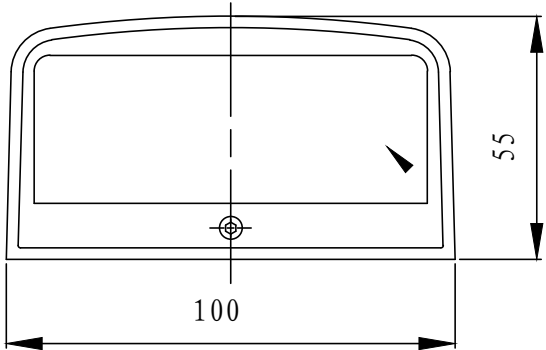

Installation template

Unit: mm

