

MAGE







W35xL40mm 1.5W

CE IP67 LM80  ZigBee® 



LED MODULE is able to be controlled by 0-10V and DALI dimming. It can be applied in backlight or edge light of giant signage(e.g. advertisement light sign, advertisement light box and billboard) or channel letter. Architectural indoor lights(for window, archway, canopy and corridor etc) can also be available. LED module: OSRAM CRI>80. LM-80 performance approval >50,000 hours.

Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria	Surface Mounted Type 明裝式燈具 Superficie Tipo Montado
Dimension-尺寸-Dimensión	L:40 x W: 35 mm
QTY of LEDs-燈珠數量-CANT de LEDs	1pcs OSRAM LED
Input Voltage-輸入電壓-Voltaje de entrada	DC12V
Power Consumption Max-燈具功率 Consumo de energía Max	1.5W
LED Driver Type LED驅動款式 Tipo de controlador LED	Remote-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60Hz 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60Hz 3. 0-10V Dimming Driver AC100-240V 50/60Hz 4. Dali Dimming Driver AC100-240V 50/60Hz 5. DMX Driver AC100-240V 50/60Hz 6. RDM Driver AC100-240V 50/60Hz 7. Emergency Backup >2 hours or >3 hours @ < 24 charger hours 應急電池/Copia de seguridad de emergencia
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control
Beam Angle 光束角 ángulo de haz	160°
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))
"Lumen Maintenance LM-80 Reported by TM-21"	1. L90(10k) = 50,700 hrs 2. L80(10k) > 63,500 hrs 3. L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	75 Lm/w(2700K), 75 Lm/w(3000K), 80 Lm/w(4000K), 85 Lm/w(5000K), 85 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	100 Lm/w(2700K), 100 Lm/w(3000K), 105 Lm/w(4000K), 120 Lm/w(5000K), 120 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Polycarbonate 聚碳酸酯 Policarbonato
Housing Color 外殼顏色 color de la carcasa	Milky 乳白色 Milky
Ingress Protection-防護等級 Protección de ingreso	IP67 - (IEC 60529)
Environment-使用環境-medio ambiente	Outdoor
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-2 / Photometric data-IES format LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547W
Certification-認證-Certificación	     

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [MAGE-1.5W-SW-65](#)

MAGE - 1.5W - -
Power Consumption LED Driver Type Color Temperature

Power Consumption		LED Driver Type		Color Temperature	
Code	Description	Code	Description	Code	Description
1.5W	1 x 1.5W	SW	ON/OFF Switch	27	2700K
		ELV	ELV Leading Edge Control	30	3000K
		AN	Analog 0 -10V Dimming	40	4000K
		DA	DALI Dimming	50	5000K
		DMX	DMX Dimming	65	6500K
		RDM	RDM Dimming		
		EM	Emergency Battery		
		ZI	ZIGBEE Wireless Control		

Technical Drawing

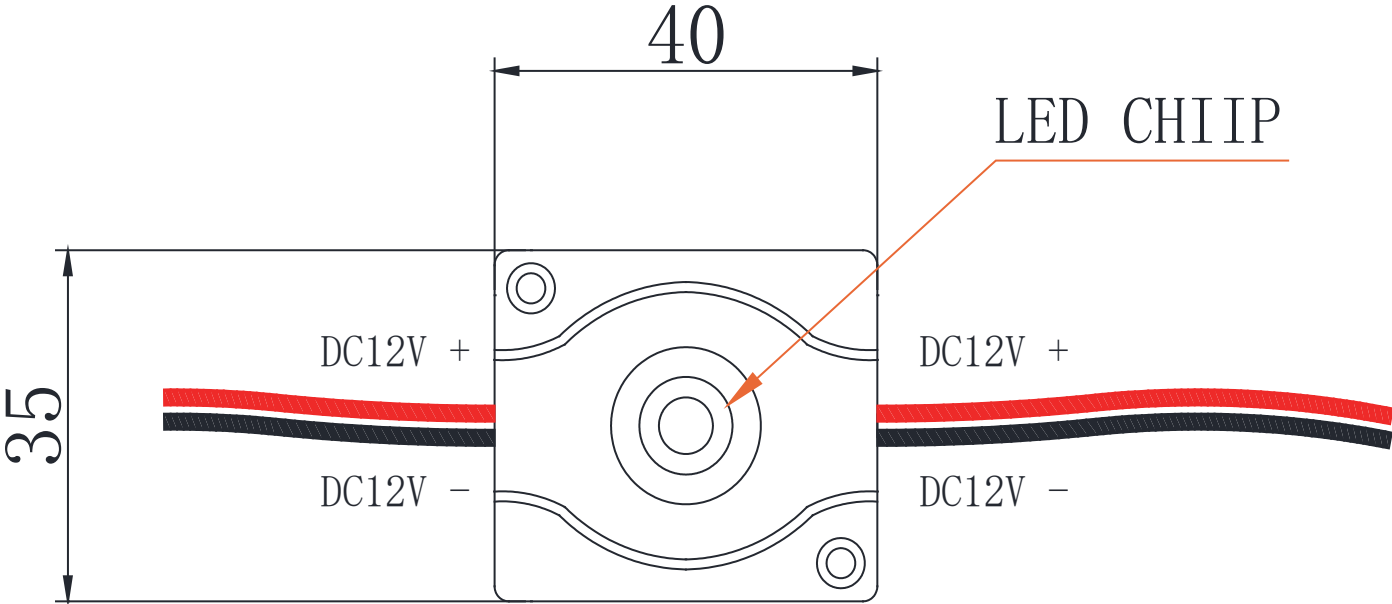

Unit: mm