

STRADY

15W/M IP67




High light transmittance PC material, uniform luminescence, no macular, no light attenuation within 3m of wall washing height. It can achieve the traditional LED light strip to achieve the wall washing effect, and can also be used for home lighting and curved surface lighting. UV resistant PVC and PC materials, PC lens and PU glue package, durable and reliable. Diversified installation methods: back glue, aluminum profile, mounting clip. Distance from Wall for 4-10CM, Optimal wall washing height is 1m -1.5m. Ingress Protection: IP67.

Technical Data

Luminaire Type-安裝方式/Tipo de luminaria	Surface Mounted Type 明裝式燈具 Superficie Tipo Montado
Dimension-尺寸-Dimensión	W: 24.2 x H: 12 mm @ Length Per Roll: 5M
QTY of LEDs-燈珠數量-CANT de LEDs And Cutting Length 切割長度/longitud de corte	42 pcs/m
Power Consumption Max / Meter-燈具功率/米 Consumo de energía Max/ Meter	15w/m
Input Voltage-輸入電壓-Voltaje de entrada	DC24 V
LED Driver Type LED驅動款式 Tipo de controlador LED	Remote-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC100-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. DMX Driver AC100-240V 50/60HZ (Dimming range from 0-100%) 6. RDM Driver AC100-240V 50/60HZ
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control
Beam Angle 光束角 ángulo de haz	45°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21" @ Ta 50 °C	L70(10k) > 60,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80 > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	• 90 Lm/w(2700K), 90 Lm/w(3000K), 95 Lm/w(4000K), • 100 Lm/w(5000K), 100 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	• 120 Lm/w(2700K), 120 Lm/w(3000K), 140Lm/w(4000K), • 150 Lm/w(5000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Polyurethane (PU) Glue and PC lens PU膠 和PC透鏡 Pegamento de poliuretano (PU) y lentes de PC
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Ingress Protection-防護等級 Protección de ingreso	IP67
Package Dimension -包裝尺寸 Dimensión del paquete	5M / Roll
Environment-使用環境-medio ambiente	Outdoor
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-1/ IEC 62471 / IEC 62493 / IEC 62031/ TM21 / ROHS LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13/IEC 61547

Certification-認證-Certificación

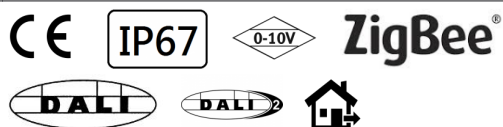

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [STRADY-15W](#)

STRADY - 15W
[Power Consumption](#)


Power Consumption	
Code	Description
15W	15W/M

BEAM ANGLE

45°

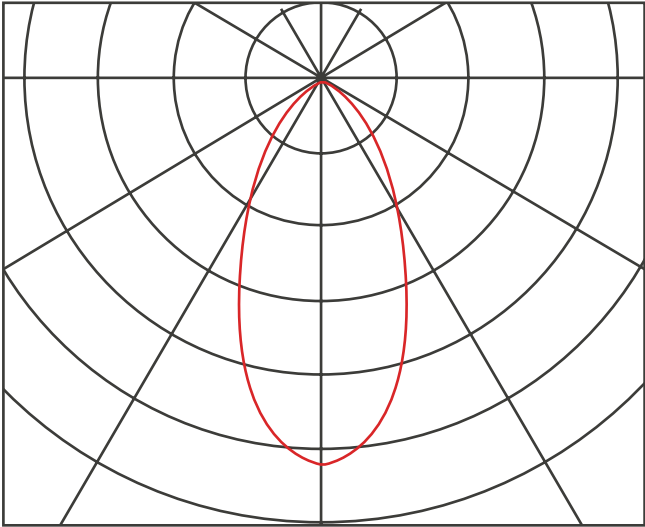

Technical Drawing

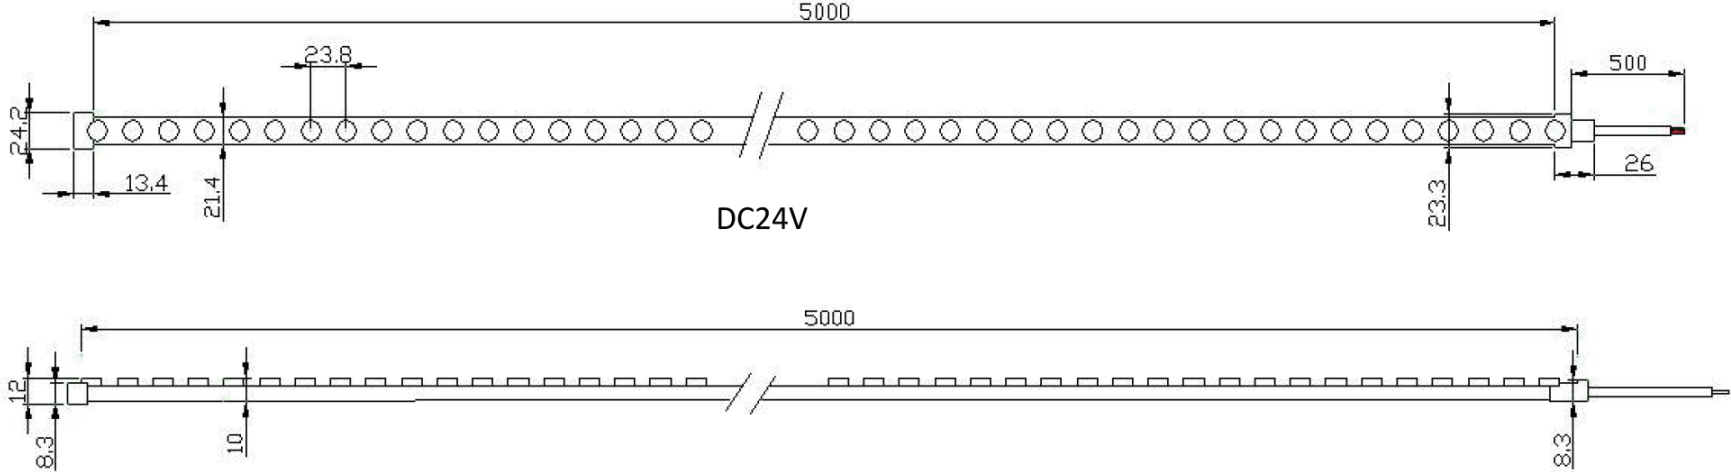

Unit: mm