

## WALM

10W Max IP65



## Metal Louver cover







- Housing: die-cast aluminium, powder-coated, designed as heat sink and ABS plastic recessed housing.
- Frosted tempered glass
- IP65 protection rating.

## Technical Data

Luminaire Type-安裝方式 Tipo de luminaria

Recessed Wall Light Type嵌入式燈具 Tipo de Recessed

Dimension-尺寸-Dimensión	• W:80 x L:185 x D: 100 mm • W:80 x L:260 x D: 100 mm	W:80 x L:230 x D: 100 mm W:80 x L:320 x D: 100 mm
Input Voltage-輸入電壓-Voltaje de entrada	AC100-240V 50/60HZ	
Power Consumption Max-燈具功率 Consumo de energía Max	• 5W @ W:80 x L:185 x D: 100 mm • 8W @ W:80 x L:260 x D: 100 mm	6W @ W:80 x L:230 x D: 100 mm 10W @ W:80 x L:320 x D:
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC100-240V 50/60HZ 2. 0-10V Dimming Driver AC100-240V 50/60HZ	
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali	
Beam Angle光束角ángulo de haz	• 90° @ Frosted tempered glass • Asymmetric @ Metal Louver	
Light Source Brand-光源品牌-Fuente de luz de marca	CREE	
"Lumen Maintenance LM-80 Reported by TM-21"	• L70(10k) > 63,500 hrs	
LED Life-LED壽命-La vida del LED	>60,000 hours	
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K	
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80	
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM	
Luminaire Efficacy燈具效率 La eficacia de la luminaria	• 70 Lm/w(2700K), @ Frosted glass cover; 40 Lm/w(2700K),@ Louver cover • 70 Lm/w(3000K), @ Frosted glass cover; 40 Lm/w(3000K),@ Louver cover • 80 Lm/w(4000K), @ Frosted glass cover; 45 Lm/w(4000K),@ Louver cover • 80 Lm/w(5000K), @ Frosted glass cover; 50 Lm/w(5000K),@ Louver cover • 80 Lm/w(6500K), @ Frosted glass cover; 50 Lm/w(6500K),@ Louver cover	
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	• 120 Lm/w(2700K),120 Lm/w(3000K),140 Lm/w(4000K), • 150 Lm/w(5000K),150 Lm/w(6500K),	
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminium and Frosted tempered glass 壓鑄鋁和磨砂鋼化玻璃 Aluminio fundido a presión y vidrio templado mate	
Housing Color外殼顏色color de la carcasa	• Matt Black RAL 9005 / Gray RAL9006 啞黑 RAL 9005 / 灰色 RAL9006 • Negro mate RAL 9005 / Gris RAL9006	
Ingress Protection-防護等級 Protección de ingreso	IP65	
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación	
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C	
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-2 / Photometric data-IES format LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547	
Certification-認證-Certificación	   	

Project	Fixture#	Date
		Firm



## Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [WALM -10W](#)


WALM - - \_\_\_\_\_  
Power Consumption

Power Consumption	
Code	Description
<a href="#">5W</a>	5W @ W:80 x L:185 x D: 100 mm
<a href="#">6W</a>	6W @ W:80 x L:230 x D: 100 mm
<a href="#">8W</a>	8W @ W:80 x L:260 x D: 100 mm
<a href="#">10W</a>	10W @ W:80 x L:320 x D: 100 mm

# Beam Angle

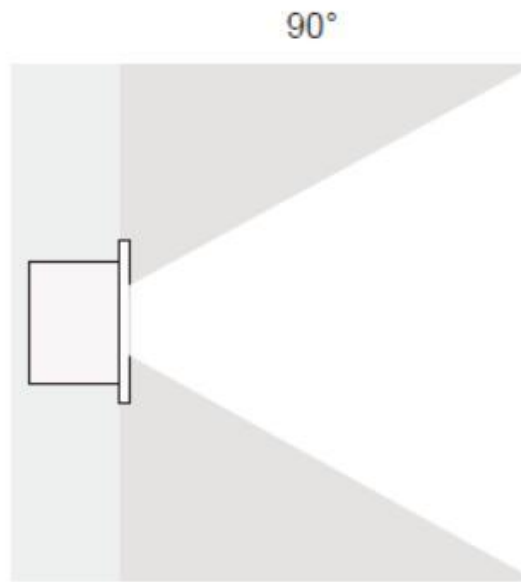


Glasss Cover Beam Angle

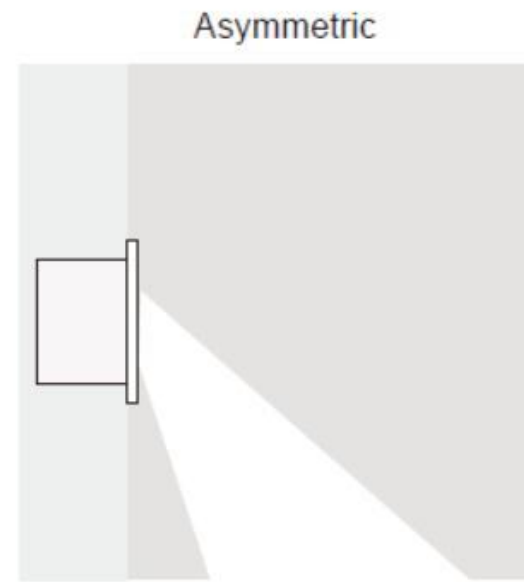


Metal frame Cover Beam Angle


Technical Drawing

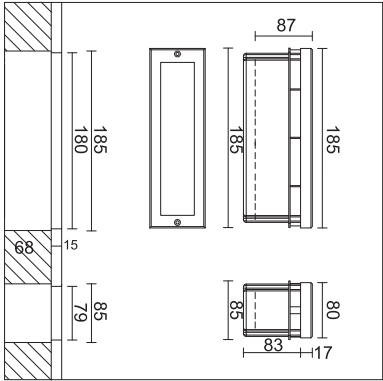


A1

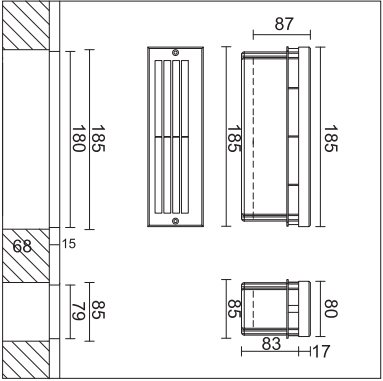


A2

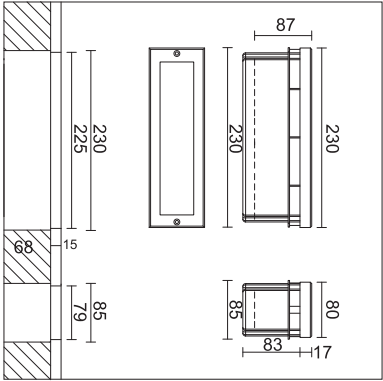


B1

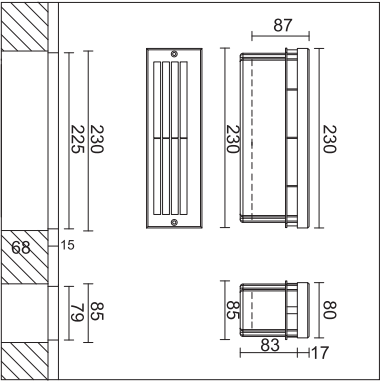


B2

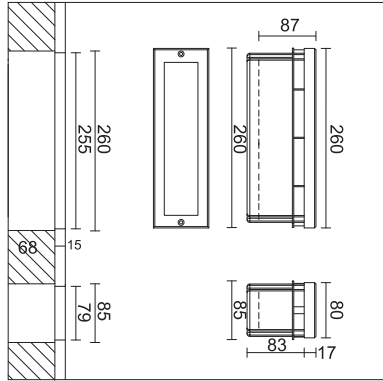


C1

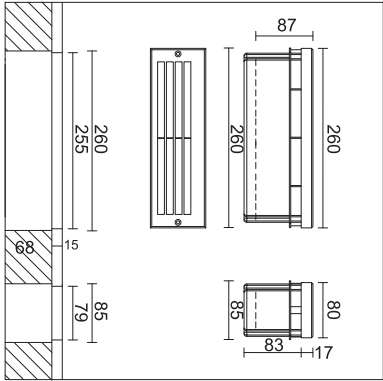

C2

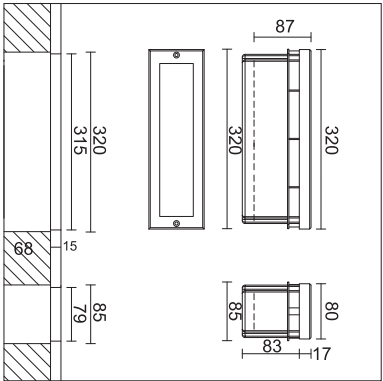

D1

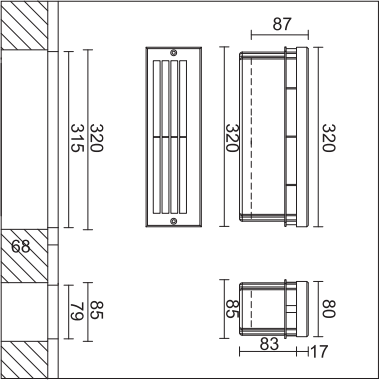

D2

Unit: mm