




WEGRY PRO

12W-25W



12W










15W/20W/25W



12W
Motion Sensor

- Die-casting aluminium body, super white tempered glass, with high visual comfort and uniform lighting distribution.
- High quality LED chips, Driver with 0-10V/DALI/programmed options.
- LED module designed, Integrated components which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.b

Technical Data

Luminaire Type-安裝方式/Tipo de luminaria	Wall Mounted Type 壁掛式 / Tipo montado en la pared		
Dimension-尺寸-Dimensión	Refer to Drawing		
Power Consumption Max-燈具功率 Consumo de energía Max	<ul style="list-style-type: none"> • 12W • 15W • 20W • 25W 		
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ		
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格/Consulte la especificación de controlador de LED 1. ON/OFF Switch AC 220-240V 50/60HZ 2. 1-10V Dimming Driver (1%-100%) AC220-240V 50/60HZ 3. Dali 1 or Dali 2 Dimming Driver(1%-100%) AC220-240V 50/60HZ 4. Motion Sensor control		
LED Driver Features-驅動特性 Funciones del controlador de LED	POWER FACTOR : PF _{0.90} @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%		
Light Source Brand-光源品牌-Fuente de luz de marca	CREE		
Beam Angle-光束角/ángulo de haz	Symmetric: 30° 60° 90° Asymmetric		
"Lumen Maintenance LM-80 Reported by TM-21"@25degree	L70 > 54,000 hrs		
LED Life-LED壽命-La vida del LED	>60,000 hours		
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K/ 5000K / 6500K		
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80		
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SCDM 標準偏差配色 < 3 SCDM Coincidencia de color estándar Desviación		
Luminaire Efficacy-燈具效率 La eficacia de la luminaria	110lm/w(2700K), 130lm/w(5000K),	110lm/w(3000K), 130lm/w(6500K)	120lm/w(4000K),
LED Source Luminous Efficacy-LED光源光效 Fuente luminosa LED Eficacia	130lm/w(2700K), 150lm/w(5000K),	130lm/w(3000K), 150lm/w(6500K)	140m/w(4000K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and tempered glass 壓鑄鋁和鋼化玻璃 Aluminio fundido a presión y vidrio templado		
Housing Color-外殼顏色 color de la carcasa	Polyester powders Coating--Matte Black RAL9005 / Grey RAL9006 / Matte White RAL9003 聚酯粉末塗料—啞光黑 RAL 9005 / 灰色 RAL 9006 / 啞光白 RAL 9003 Revestimiento en polvo de poliéster: negro mate RAL 9005 / gris RAL 9006 / blanco mate RAL 9003		
Ingress Protection-防護等級 Protección de ingreso	IP66		
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C		
Operating Humidity -工作濕度 Humedad de funcionamiento	0~100%, non-condensing-不結霜 sin condensación		
Certification-認證-Certificación	      		

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [WEGRY-12W](#)

WEGRY - _____
Power Consumption

Power Consumption	
Code	Description
12W	12W
15W	15W
20W	20W
25W	25W

Technical Drawing

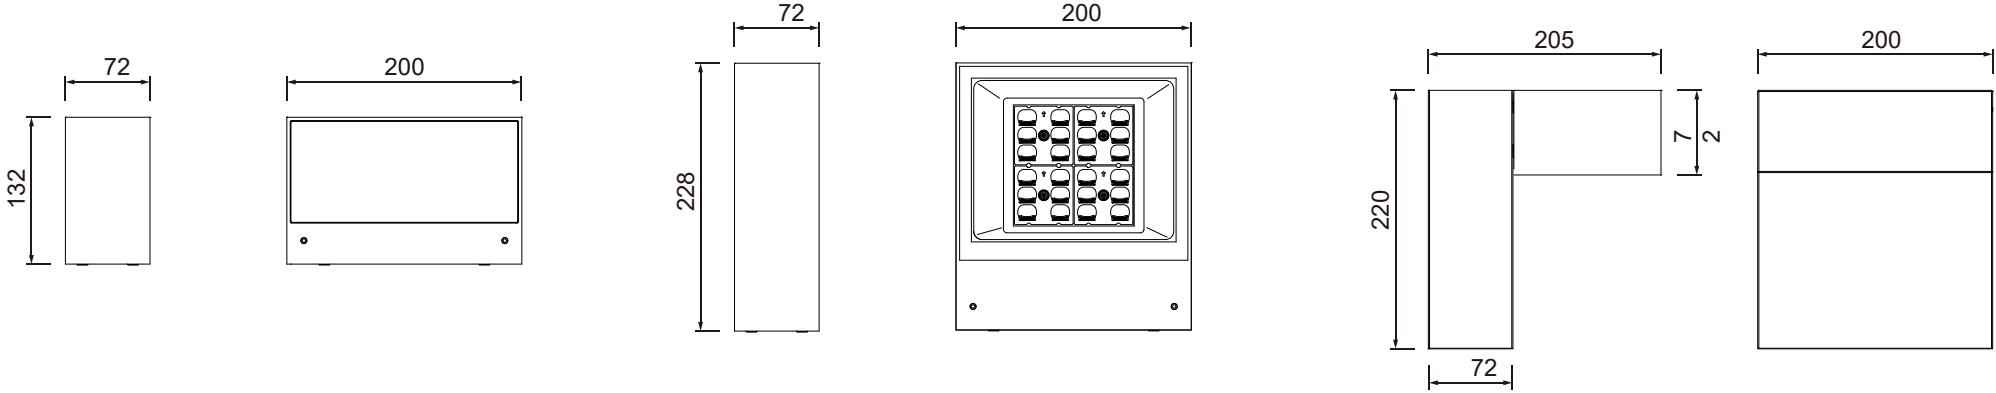

Unit: mm